


CopperPlus™

Copper clad stainless steel

The beauty of copper
with the performance of
stainless steel

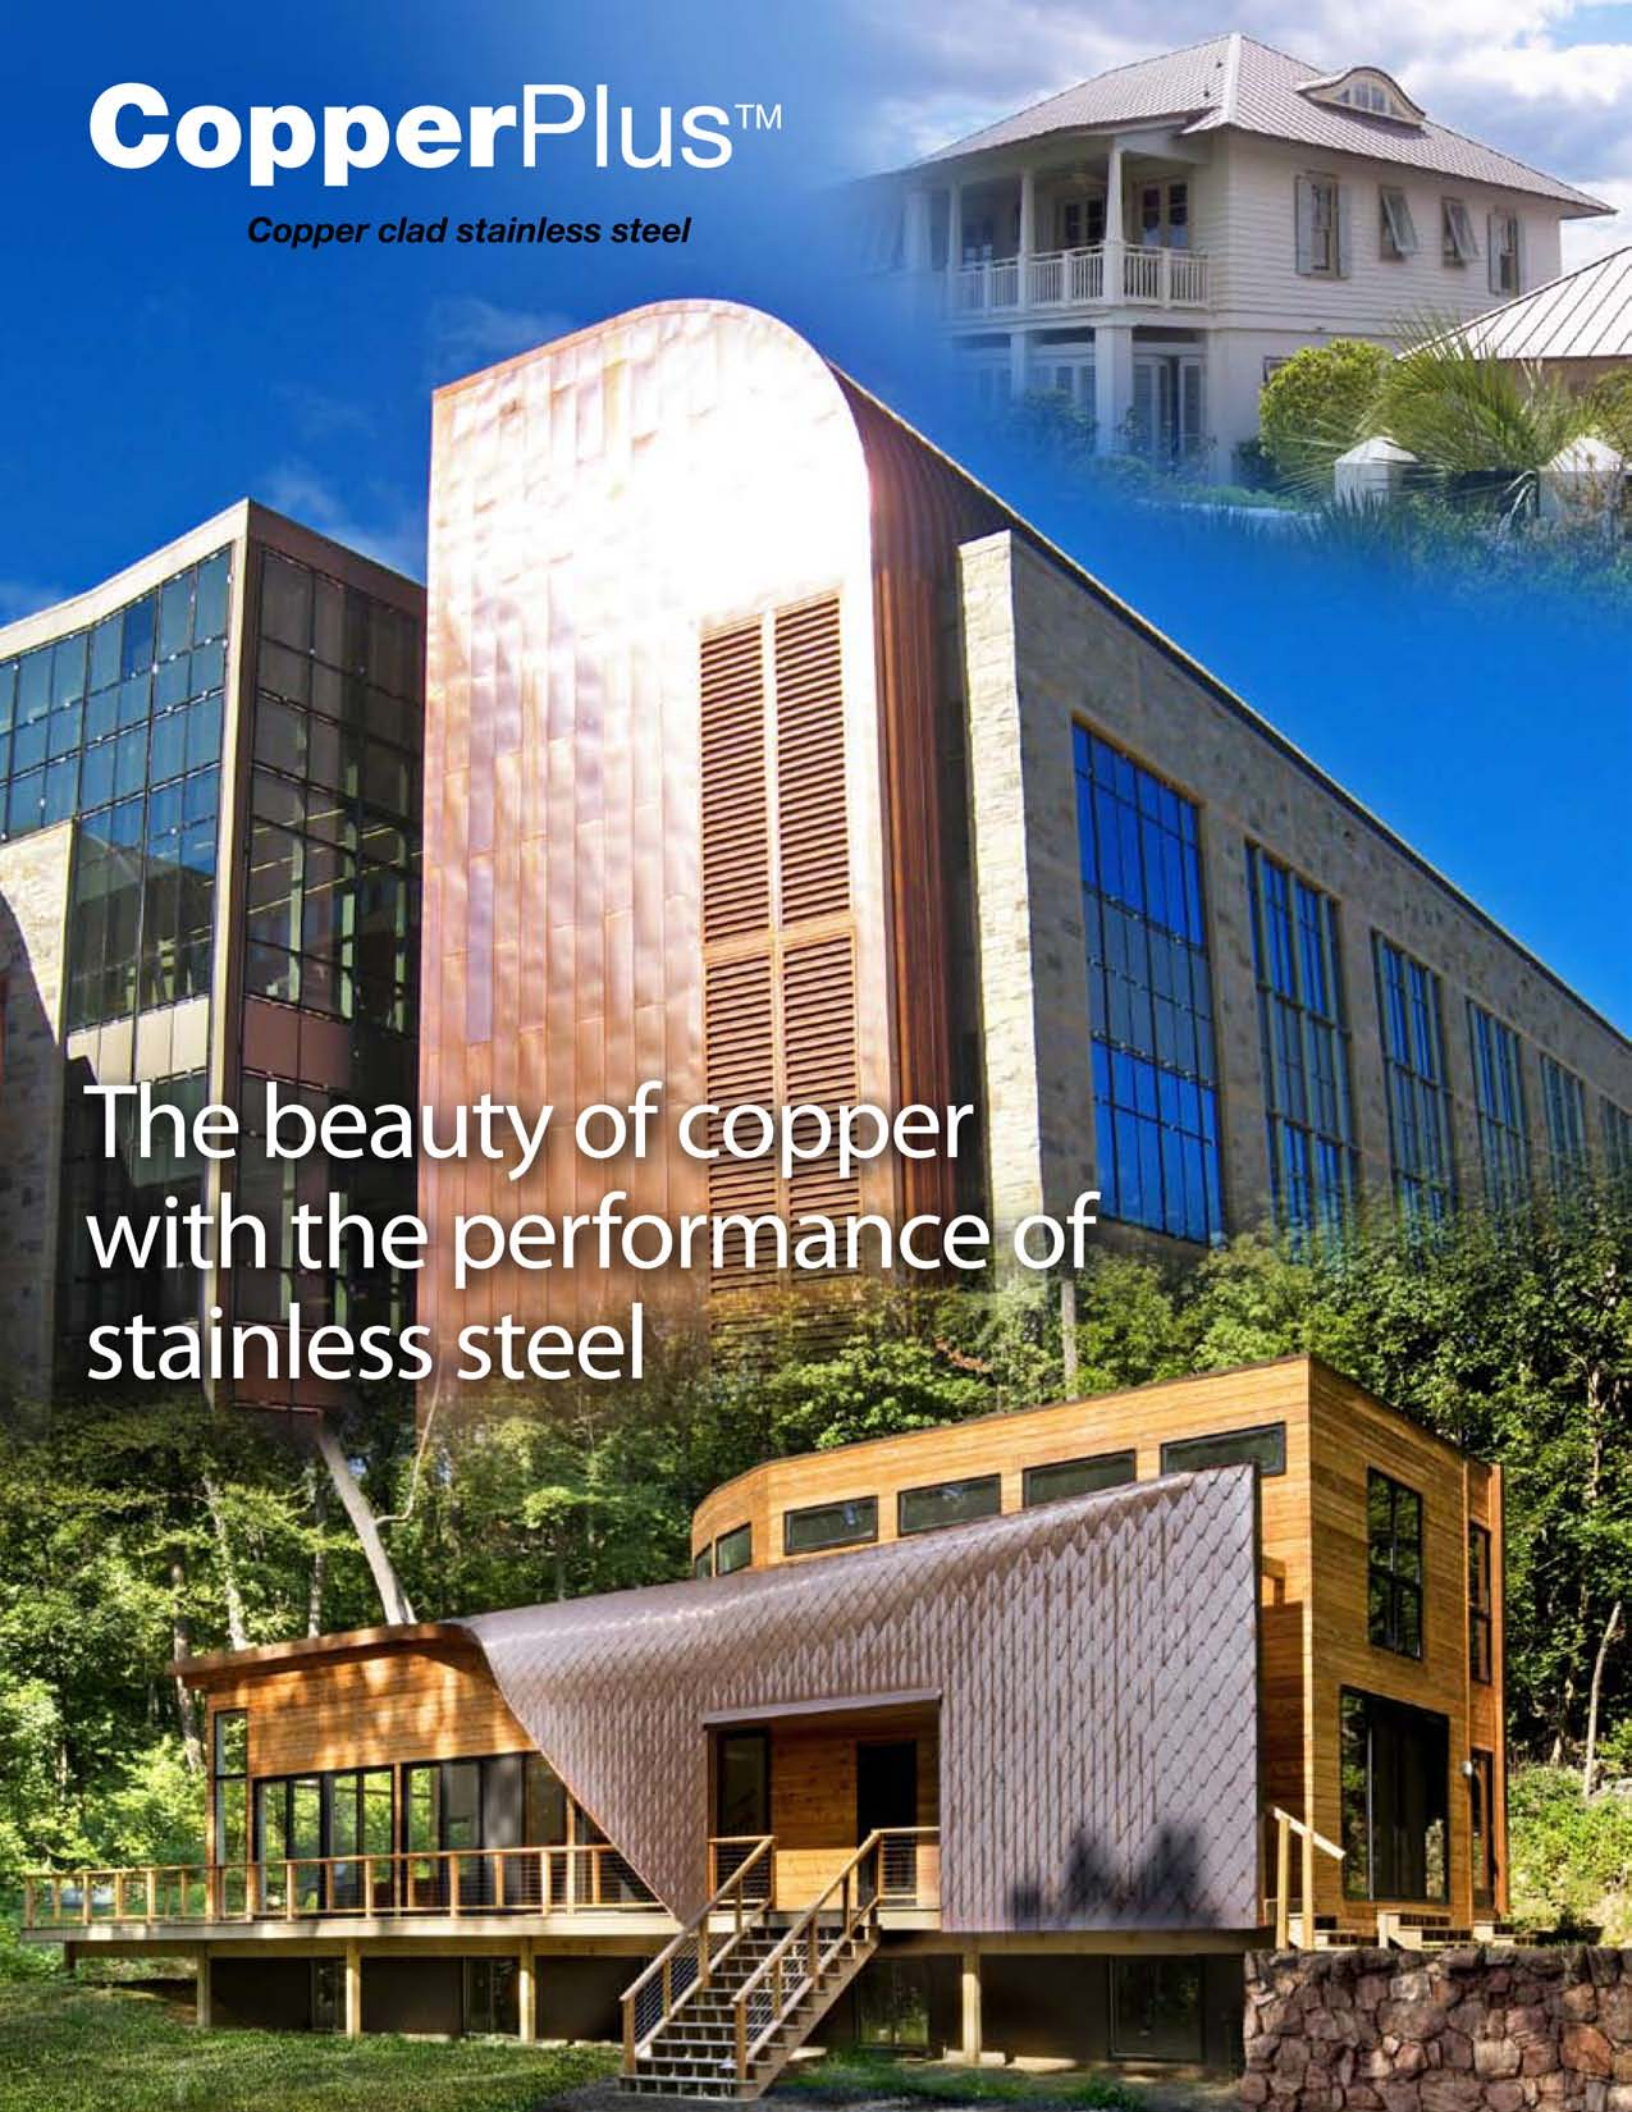

More than copper for less than copper.

CopperPlus copper clad stainless steel (ASTM B506) looks just like solid copper, which means you can have the classic beauty of solid copper at a much lower price. You also get greater strength, increased durability, lower weight, reduced thermal expansion, improved solder joints and complete formability. In other words, much more for much less.

Weighs less. Costs less.

CopperPlus outperforms copper yet weighs significantly less. You save money because the outer layers of copper are bonded to a core of stainless steel. Less copper equals less cost.

Stronger.



The stainless steel core in CopperPlus provides a significant strength advantage over plain copper. Thus, you can use thinner gauges while at the same time achieving improved mechanical performance.

Lasts longer.

Copper is soft and susceptible to failure from erosion corrosion. But the stainless steel core of CopperPlus limits wear, which is why CopperPlus installed in the 1960s still performs as well as when it was installed.

What it is, how it's used.

CopperPlus looks like copper, forms like copper, ages like copper, because it is copper. But it's also much more. It's copper *metallurgically bonded* to a core of stainless steel, creating a new clad material with the best characteristics of both.

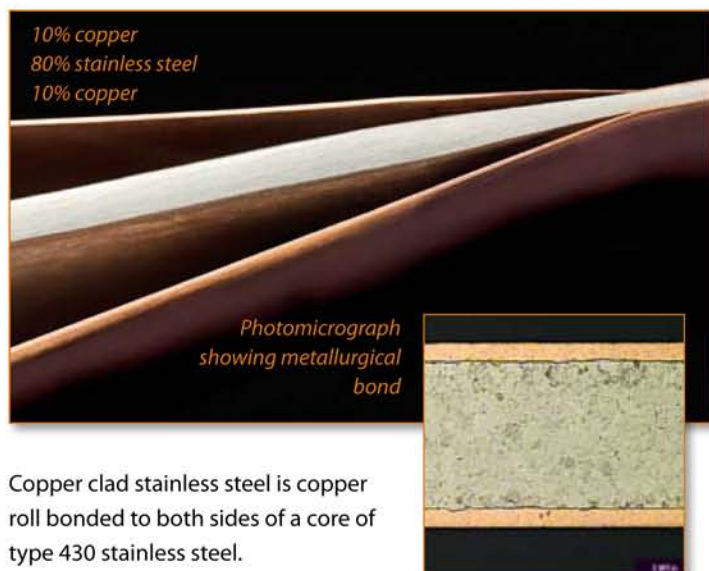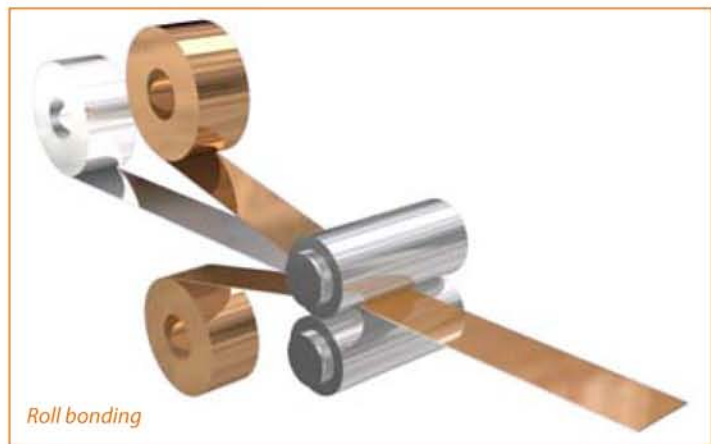

Roofing

CopperPlus has the strength of stainless steel, yet it's easy to fabricate standing seam, batten seam, Bermuda seam, mansard or virtually any other roofing style. Available in coil form, it can be easily cut to any length you want.



Flashing

CopperPlus cuts, forms and installs easily, and it's compatible with all types of mortar and mortar additives. Perfect for base, counter, cap, eave, valley, drip, fascia and step flashing.



Rain Drainage

The ability to accept severe forming makes CopperPlus perfect for gutters, downspouts and fabricated rain drainage components. The stainless steel core provides greater erosion resistance than copper, and therefore fewer failures.



Decorative Components

CopperPlus looks and ages just like copper, which makes it ideal for fabricating dormers, cupolas, finials, spires, scuppers and conductors.

Fascia/Wall Panels

As you'd expect, CopperPlus is compatible with all custom and standard designs.

The architectural metal for the Regents Hall of Natural and Mathematical Sciences at St. Olaf College in Northfield, Minnesota, was originally specified to be solid copper. By changing the endwalls and louvered panels to CopperPlus, Architects Holabird and Root and sheet metal supplier M. G. McGrath, were able to save the school substantial cost.

Solders easier.

CopperPlus has lower thermal conductivity than ordinary copper, so you can use smaller, cooler irons and get easier solder flow, higher joint shear strength and faster installation.

Takes any form.

CopperPlus, even with the added strength of its stainless steel core, can be shaped, fashioned and formed just like copper, using the same tools. Gutters, downspouts, cornices and other intricate shapes are easily formed to bring beauty, quality and durability to any installation.



Use it wherever copper is used.

Installs the same.

CopperPlus is installed in accordance with recognized construction sheet metal practices. It's readily cut, formed, soldered, welded, riveted, nailed, and otherwise worked by all the conventional sheet metal methods. Plus, because of its inherent strength, there's less chance of damage to the material before, during, and after installation.



Solders faster.

CopperPlus is quickly and easily soft-soldered using 50-50 or higher tin content solder and mild copper-soldering fluxes. Smaller, cooler irons can be used to speed up the soldering.



Easy to form.

Fully annealed CopperPlus forms like solid copper and other soft construction materials. It can be bent flat on itself (180° bend, ½ T radius) at all standard gauges.



Cuts like steel.

CopperPlus is cut in the same way as steel, using sharpened and aligned conventional hand and power tools.



Fastens easily.

CopperPlus can be installed using any of the usual fasteners — nails, screws, bolts, rivets, clips, etc. — which are made of copper, stainless, brass or bronze.

Comes the way you want it.

CopperPlus is available in coils, rolls or cut-to-length sheets up to 24" wide.





Harris Bank, Hinsdale, Illinois
 John A. Mayes, Donald
 H. Williams & Partners/
 Architects A.I.A. R. H. Roberts
 Construction Co., Builder
 Roof installed 1969

CopperPlus has been tested and proven in the most stringent way possible — almost forty years in the field, with no discernible difference between copper and CopperPlus. When we developed CopperPlus in the 1960s (when copper prices were soaring much as they are now) we knew it would age just like copper—because the outer layers are copper. Now, nearly four decades later, there's undeniable proof.

How it outperforms copper.

Mechanical and Physical Properties

| Property | CopperPlus ASTM B506 O60: soft | Copper ASTM B370 H00: 1/8 hard | Copper ASTM B370 H01: 1/4 hard |
|---|--------------------------------------|--------------------------------------|--------------------------------------|
| Yield Strength [ksi] | 40 | 28 | 30 |
| Ultimate Tensile Strength [ksi] | 60 | 36 | 38 |
| Elongation in 2 inches [%] | 32 | 30 | 25 |
| Density [lbs/in ³] | .287 | .323 | |
| Modulus of Elasticity [10 ⁶ psi] | 27 | 17 | |
| Coefficient of Thermal Expansion [μin/in·°F] | 6.1 | 9.6 | |
| Thermal Conductivity [BTU/ft·hr·°F] | 37 | 226 | |

www.copperplus.com

North American Authorized
 Distributor:

Heyco Metals, Inc.
 1069 Stinson Drive
 Reading, PA 19605
 Toll Free: 800-57-HEYCO
 Tel: 610-926-4131
 Fax: 610-926-4134

www.heycometals.com/
copperplus/contact.asp

For distribution information in
 Europe, please contact:

James Craggs
 Engineered Materials Solutions
 PO Box 720
 Amersham
 Buckinghamshire
 HP6 9DG
 United Kingdom
 Tel: 44 77 99 358 150
jcraggs@emsclad.com

For distribution information for
 other locations, please contact:

Michael Hardy
 Engineered Materials Solutions
 39 Perry Ave., MS 4-8
 Attleboro, MA 02703
 U.S.A.
mhardy@emsclad.com



Engineered Materials Solutions